

AmpMem 1.0



Copyright © 2003 [The Ideal Universe](#)

November 17, 2003

Welcome to AmpMem version 1.0 for Palm OS. AmpMem allows you to 'add' a memory function to your vintage instrument amplifiers. It is customizable to fit most amplifiers, and can even be used for effects pedals as well.

Requirements:

Minimum of Palm OS 3.5

185 k available RAM

Installation:

To install AmpMem, place the AmpMem.prc file in your HotSync directory and perform a hotsync operation. The AmpMem.prc file is actually an automatic installer. The first time it is run, it will create/install the necessary files, and open AmpMem for you.

Uninstalling AmpMem:

To Remove AmpMem, use the delete function on your handheld. This will delete the main AmpMem application, all of the programmed memories, amplifiers, pedals, cabinets, and controls. AmpMem also uses 3 shared library files. These allow AmpMem to perform some special functions. There are many applications that use the same libraries. It is recommended that you leave these files installed to avoid disabling other applications that might be using them. During the initial install process, the installer will notify you if these libraries are already installed on your device. If they are, then another application installed on your device is using one or more of the library files and you should leave them installed. If you did not get any notifications during the install process, and you haven't installed anything after installing AmpMem, you should be able to remove the libraries without worry. If you find that there are one or more applications that don't work properly after uninstalling AmpMem and its' libraries, either reinstall the application or contact [Ideal Universe Support](#) to obtain the libraries as a separate install. This should repair any problems with the other application(s).


Using AmpMem -Main View:

This is the main screen for AmpMem. It shows you a list of the memories you have already programmed. There are buttons here labeled Amps, Cabinets, Pedals and Controls. Each of these will bring you to the appropriate editoe where you can add, change, or remove items from the lists. The Favs Button will show you the memories that you have marked as favorites. The sort button will re-sort the list alphabetically. Tap it once for A to Z. Tap it again for Z- A. At the top of the screen is a dropdown menu. Select one of the amplifiers from the list to only view the memories for that amplifier. Select the 'Show All' option to view the memories for all amplifiers. If this is your first time using AmpMem, you must first add at least one amplifier to the Amplifiers section before adding any memory entries. If there are already memories programmed, you can tap its' name in the list to go to the settings for that memory.







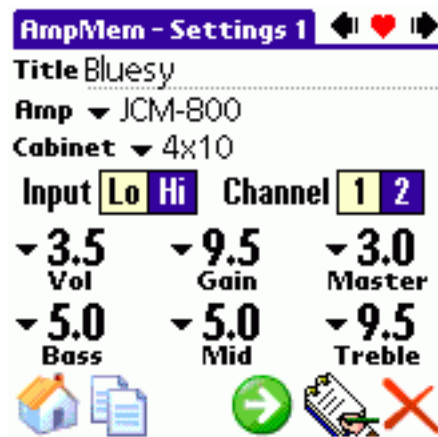

Using AmpMem - Settings 1

Here is the main settings screen for the memories. You can give your memory a title. This is what will show in the list on the previous screen. Select an amplifier and cabinet (if neccessary) from the popup lists by tapping the small arrow next to the label. All of the controls here (volume, gain, master, etc...) can be given a value from 1 to 10 (including 1.5, 2.5, 3.5...).



There are numerous navigation options here as well. At the bottom of the screen are (from left to right) are:


-  Home (brings you back to the list view)
-  Copy (makes a duplicate of this memory)
-  Previous screen (not visible on this screen)
-  Next screen (brings you to the next settings screen)
-  Notes (brings up the note editor for this memory)
-  Delete (deletes this memory entry completely)

At the top of the screen are more navigation buttons. The small heart will add or remove this memory from your favorites list. The left and right arrows will let you scroll through the memories (Previous and Next) without going back to the main list screen.

All of the above buttons are on all of the settings screens. Tap the Home Icon at any time to return to the beginning screen (list view).

Using AmpMem - Settings 2

There are more advanced settings available for memorizing other amplifier settings such as Reverb and Presence. There are also 3 user settings on this screen. Tap the Select button to choose the label for the control.

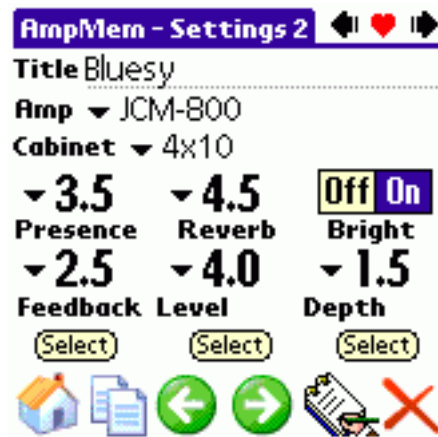

Using AmpMem - Effects 1 and 2

If you use effects pedals along with you amplifier, you can memorize settings for them as well. There are 2 pages of settings for effects pedals. Both can store 2 effects worth of settings. Each effect can have a maximum of 3 controls. If the effect you are using has more than 3 controls, use more than 1 of the AmpMem memory spaces.



Using AmpMem - Favorites

By tapping the small heart button at the top of the screen, you can select a memory to be placed in the favorites list. To view the favorites, tap the Favs button on the main screen. To return to the normal

view, tap the button again.